

J
DRAWING NUMBER S2110
SIZE A
SCALE: NONE
DATE: 5-17-85
APPROVED BY: TD
CHECKED BY: TD
DRAWN BY: PJ
2110, 2115
FIGURE NUMBER

SMITH® JAY R. SMITH MFG. CO.®
MEMBER OF MORRIS GROUP INTERNATIONAL
POST OFFICE BOX 3237
MONTGOMERY, ALABAMA 36109-0237 (USA)
TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com




LOCATION

FLOOR DRAINS

WITH 8 1/2" (215) ROUND TOPS

MEDIUM DUTY DRAINS

FUNCTION: Used in moderate traffic areas where waste water contains no sediment or debris and floor construction requires shallow drain body. Body flange and flashing collar serve as anchor in on-grade locations and as flashing clamp when installed in waterproof floors.

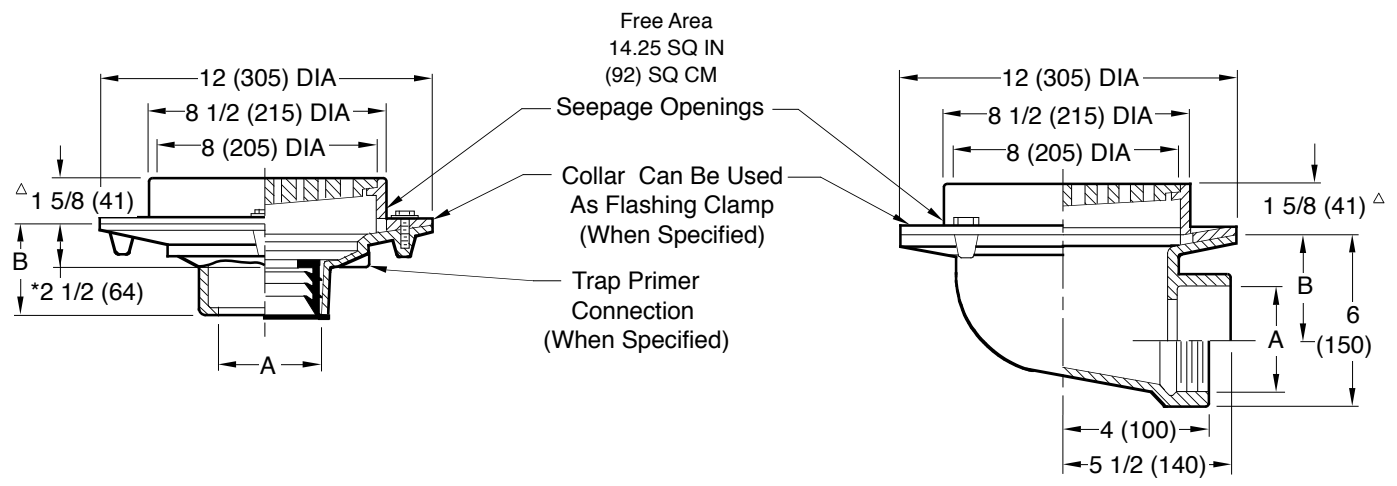

Free Area
14.25 SQ IN
(92) SQ CM

** Fig. 2110C ... CAULK OUTLET
 Fig. 2110Y ... NO-HUB OUTLET

Fig. 2115C ... CAULK OUTLET
 Fig. 2115T ... THREADED OUTLET

A SIZE	02 (50)	03 (75)	04 (100)	06 (150)
B	3 3/4 (95) for Caulk, NO-HUB, and Speedi-Set, 2 (51) for Threaded		3 3/4 (95) NO-HUB Only	

A SIZE	02 (50)	03 (75)	04 (100)
B	4 1/4 (110)	3 3/4 (95)	3 1/4 (83)

REGULARLY FURNISHED:
Ducto Cast Iron Body and Flashing Collar with Cast Iron Bar Grate.

- VARIATIONS:**
- Closure Plug -XP (Fig. 2110 only)
 - Deflector Grate -DG
 - Dome Grate -D
 - Flat Bottom Strainer -FBS (Fig. 2110 only)
 - L Speedi-Set Service Weight (Fig. 2110 only)
 - LXH Speedi-Set Extra Heavy (Fig. 2110 only)
 - NO-HUB Adaptor (Specify Fig. 2646Y) (Fig. 2115 only)
 - Sediment Bucket -B
 - Square Top -S
 - Trap Primer Connection -P050 1/2" (13) & -P075 3/4" (19)
 - Vandal Proof Grate -U
 - Wide Flange Deck Drain (Specify Fig. DX2565)
 - T Threaded Outlet
 - Quad Close Trap Seal (Specify Fig. 2692) (Fig. 2110 Only)

- OPTIONAL MATERIALS:**
- Ductile Iron Grate -M
 - Galvanized Cast Iron -G
 - Nickel Bronze Top -NB
 - Polished Bronze Top -PB
 - Stainless Steel (Specify Fig. 9710)

△ Add 3/16" (5) when bronze top is specified.

*This dimension to internal stop of Speedi-Set gasket.
**Meets U.S. Gov't Spec. per WW-P-541-b, Type 220, 02 (50) and 03" (75) sizes only. * See Fig. 2130 for 04" (100) size.

Meets ANSI Spec A112.6.3-2001
02(50), 03(75) or 04"(100) sizes only.

*Not available on Fig. 2110T threaded outlet drain.

NOTE: Dimensions shown in parentheses are in millimeters.

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
J	6-10-15	Revised Variations	TBW	CL			2110, 2115
H	4-25-14	Revised MM	TBW	CL			
G	11/17/05	Revised 2110 A-Size Table	JJ	CL			
F	05/10/05	Revised ANSI note	JJ	AM			

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE