
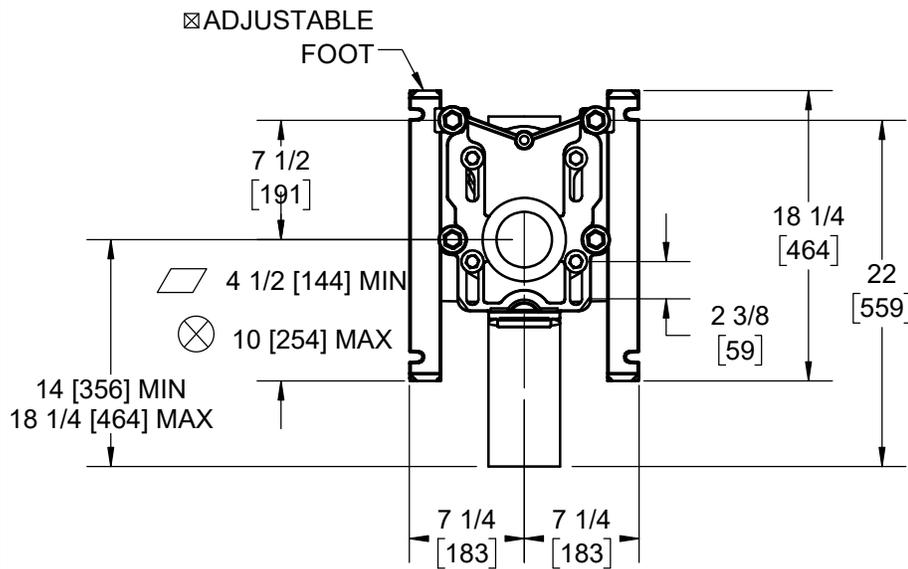
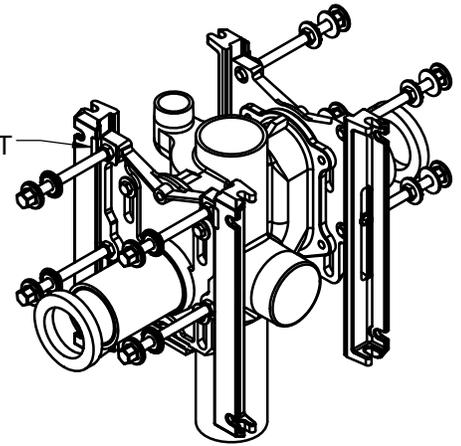


SPECIFICATION:

JOSAM 12724-SDH SERIES COATED CAST IRON DOUBLE VERTICAL 4" NO-HUB ON STACK FITTING WITH 2" NO-HUB OFFSET VENT, ADJUSTABLE CARRIER BODY, INVERTIBLE FOR SIPHON JET OR BLOWOUT CLOSETS, WITH ABS EXTENSION WITH INTEGRAL TEST CAP, PYLON FEET, ANCHOR FOOT, UPGRADED HARDWARE AND NEOPRENE FIXTURE GASKET. CARRIER MEETS ASME REQUIREMENTS AT 750 LBS.

**CLOSET CARRIER
VERTICAL BACK-TO-BACK**

SERIES **12724-SDH**

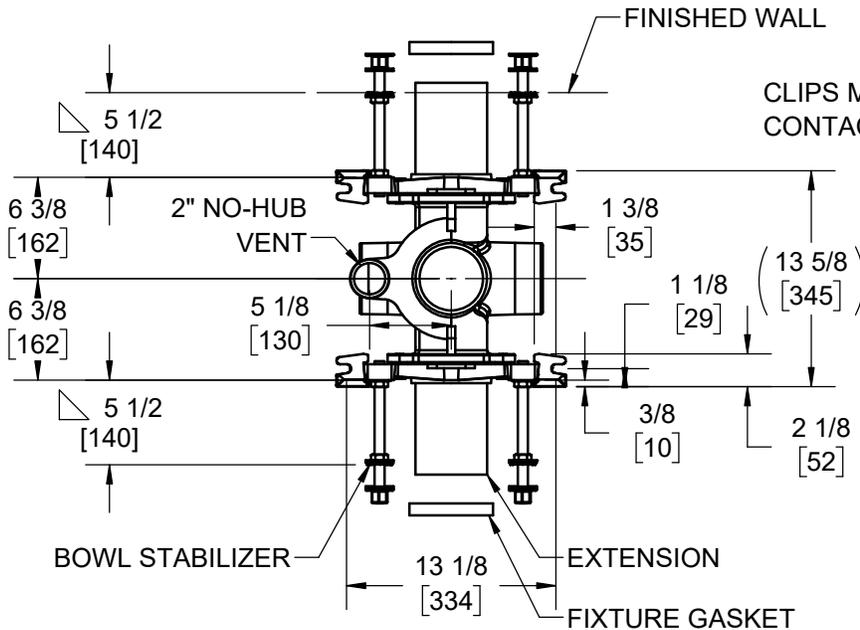

△ FOR DIMENSION SHORTER THAN 5-1/2" (1" MIN) CUT EXTENSION. FOR LONGER EXTENSION (10-1 1/2" MAX) SPECIFY (-10)

⊠ FEET BE SECURED TO FLOOR WITH 1/2" BOLTS AND ANCHORS (BY OTHERS).

⊗ FOR SIPHON JET ROUGHING OVER 6" OR BLOWOUT ROUGHING OVER 12-1/2" SPECIFY ON ORDER.

SIPHON JET DIMS SHOWN. FOR BLOWOUT DIMS, USE:

▱ MIN 11 & MAX 16-1/2

X	-SDH	750 lb CAPACITY CARRIER	-6	SUPPLY PIPE SUPPORT (SPECIFY TYPE OF PIPE)
	-PF	PYLON FOOT, STD.	-10	ABS EXTENSION THROUGH 10-1/2" WALL
	-OR	O-RING CARRIER	-24	FLOOR MOUNTED BACK OUTLET CHINA BOWL
	-HS	HUB & SPIGOT	-30	CAST IRON ADJ. EXTENSION W/ CONNECTOR
	-VS4	VENT SIDE 4" NO-HUB BRANCH	-30-2	CAST IRON ADJ. EXTENSION W/ CONNECTOR & TEST CAP
	-OS4	OPPOSITE VENT 4" NO-HUB BRANCH	-32	CARRIER FOR WIDE CHASE INSTALLATIONS
	-HVS4	VENT SIDE 4" HUB BRANCH	-35	CARRIER FOR WHEELCHAIR HIGH ROUGH
	-D4	DOUBLE 4" NO-HUB BRANCHES	-49	2" NO-HUB AUXILIARY INLET, UNDER VENT
	-HD4	DOUBLE 4" HUB BRANCHES	-50	2" NO-HUB AUXILIARY INLET, OPPOSITE VENT
	-VP	VANDAL-PROOF TRIM	-53	2" THREADED AUXILIARY INLET, UNDER VENT
	-1	POSITIONING FRAME	-54	2" THREADED AUXILIARY INLET, OPPOSITE VENT

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

DATE OF LAST CHANGE: 5/27/20

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCES AND CHANGE WITHOUT NOTICE. WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA.



MICHIGAN CITY, INDIANA

NOTES