

Location: _____




MI-200

**ELECTRONIC TRAP SEAL
PRIMER WITH AIR GAP**

Specification: The MI-200 is engineered to connect to the voltage building energy management system used to manage the services in commercial, educational and institutional buildings. It can be located anywhere in the water supply. A manifold is provided as part of the assembly so that up to 5 drains can be served. The MI-200 is practical for infrequently used buildings such as convention centers and sports facilities. The MI-200 is manufactured in accordance with ANSI/ASME A112.1.2 air gap in plumbing systems Standard. UA1818 access door is suggested for access to the MI-200 when installed into the wall. NOTE: Timer not included.

Function: The MI-200 is engineered to connect to the low-voltage building energy management system used to control the services in commercial, educational and institutional buildings. It can be located anywhere in the water supply. The MI-200 is practical for infrequently used buildings such as convention centers and sports facilities. It is manufactured in accordance to the ANSI/ASME A112.1.2 air gap in plumbing systems Standard. The UA 12" x 12" access door is suggested for access to the MI-200 when installed into the wall.

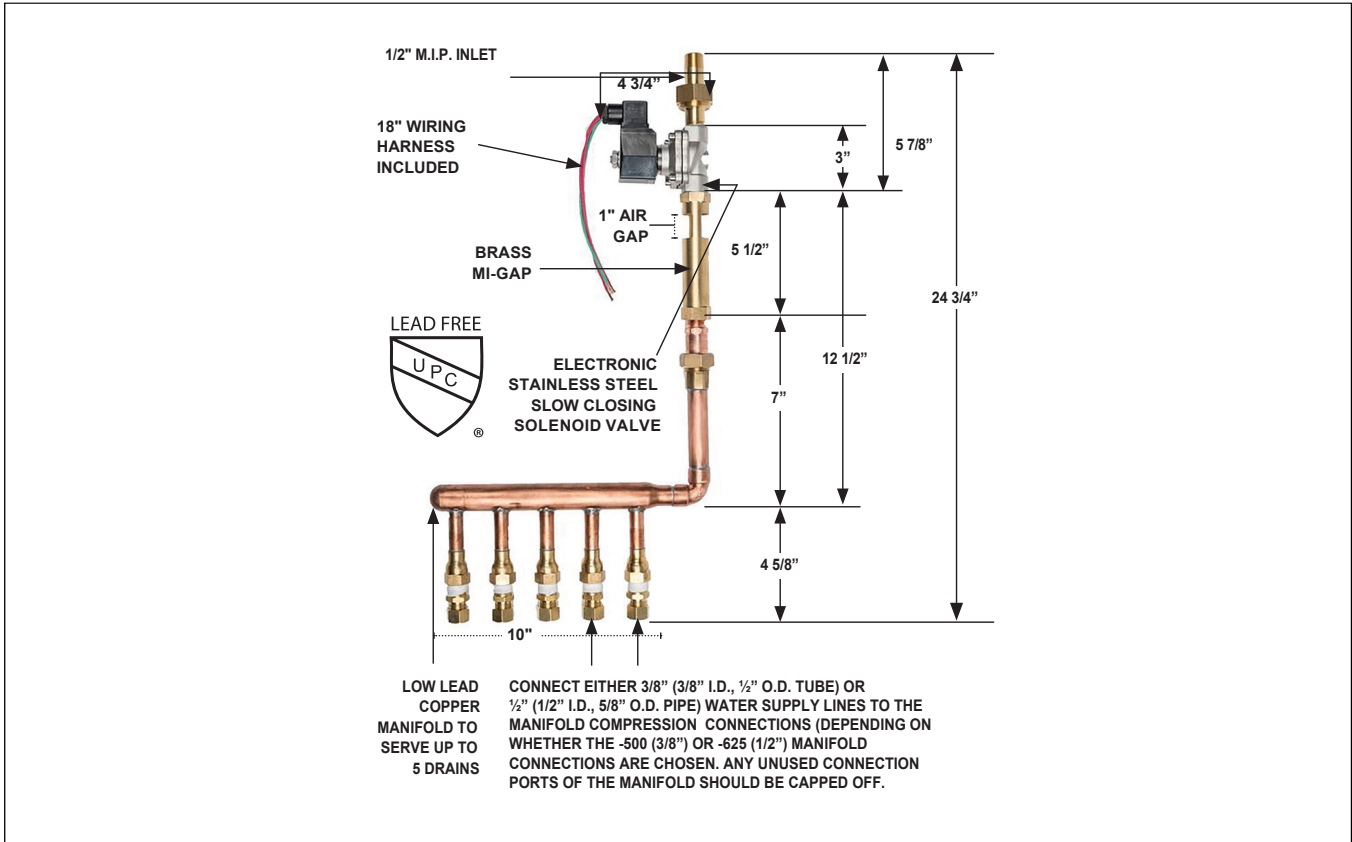

MODEL NO.

DESCRIPTION

MI-200-500-24VDC	connections for 1/2" piping, 24 VDC
MI-200-625-24VDC	connections for 5/8" piping, 24 VDC
MI-200-500-120VAC	connections for 1/2" piping, 120 VAC
MI-200-625-120VAC	connections for 5/8" piping, 120 VAC
MI-200-500-220VAC	connections for 1/2" piping, 220 VAC
MI-200-625-220VAC	connections for 1/2" piping, 220 VAC

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____

MI-200 ADDITIONAL VARIATIONS

SUFFIX	DESCRIPTION
-3P	120VAC 3 Prong plug
-A	Allen key lock for access door (door is separate)
-AD	Cabinet Cover (bolted to cabinet frame and non hinged) (16 gauge powder epoxy coated steel white)
-ADSS	Stainless Steel (Type 304) Cabinet Cover (bolted to cabinet frame and non hinged) (16 gauge fabricated stainless steel (Type 304)
-BA	Buy American Act compliant product
-BP	Battery Pack
-C	Cylinder key lock for access door (door is separate)
-DW	Drywall bead frame for access door (5" cabinet depth) (door is separate)
-ENC	Steel Cabinet to enclose MI-200 / MI-300 (16 gauge powder epoxy coated steel (white) cabinet
-ENCSS	Stainless Steel (Type 304) Cabinet to enclose MI-200 / MI-300 (16 gauge fabricated stainless steel (Type 304)
-MFRU	Uninsulated fire rated access door, flush mount (6" minimum overall depth) (door is separate)
-PL	Paddle latch for access door (door is separate)
-SS	Stainless Steel (Type 304) Cabinet (16 gauge fabricated stainless steel (Type 304) (<i>MI-100, MI-100-DR</i>)
-UA	Access door, prime coated (5" minimum overall depth)
-UASS	Access door, stainless steel (5" minimum overall depth)
-24VAC	24VAC
-24VDC	24VDC
-75WS	3/4" water supply connection
-120VAC	120VAC
-220VAC	220VAC
-500	1/2" compression connection ports
-625	5/8" compression connection ports