


4480 Stainless Steel Bellows Type Shock Absorber / Hammer Arrestor

Project	Engineer	Mechanical
---------	----------	------------

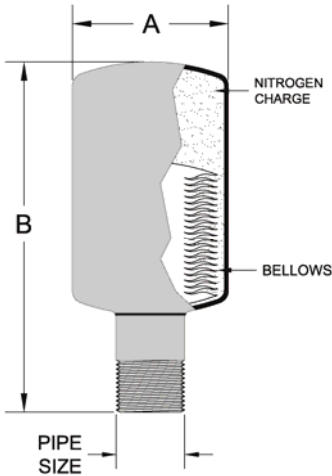

4480-A

Regularly Furnished: All stainless steel shock absorber / hammer arrestor with welded, nested bellows.


Maximum Working Pressure: 125 psi

Maximum Static Pressure: 250 psi

Operating Temperature Range: 33 °F to 300 °F

PDI Size	Pipe Size	A	B	Fixture Units	●
A	3/4"	3 1/4	3 1/4	1-11	
B	1"	3 1/4	4 1/16	12-32	
C	1"	3 1/4	4 3/8	33-60	
D	1"	3 1/4	5 1/4	61-113	
E	1"	3 1/4	7	114-154	
F	1"	3 1/4	7	155-330	

4481 Copper Piston Type Shock Absorber / Hammer Arrestor

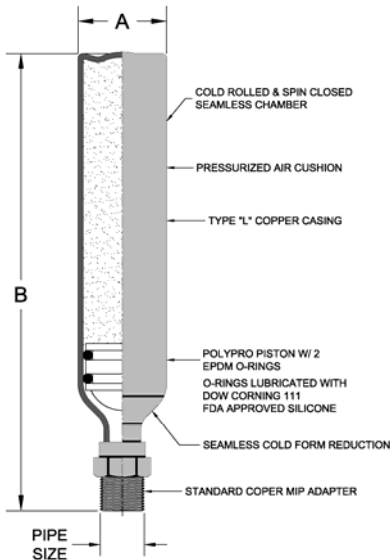

4481-A

Regularly Furnished: Seamless copper shock absorber / mer arrestor with polypropylene piston & EPDM O-rings.

Maximum Working Pressure: 125 psi

Maximum Static Pressure: 250 psi

Operating Temperature Range: 33 °F to 300 °F

ham-

PDI Size	Pipe Size	A	B	Fixture Units	●
A	1/2"	1 1/8	6	1-11	
B	3/4"	1 1/8	7 1/4	12-32	
C	1"	1 3/8	8 3/4	33-60	
D	1"	2 1/8	10	61-113	
E	1"	2 1/8	12 3/4	114-154	
F	1"	2 5/8	11 1/8	155-330	