


# GREEN ROOF MAIN AREA DRAIN WITH STANDPIPE

DRAWING NUMBER: **s1900**  
 SIZE: **A**  
 SCALE: **NONE**  
 DATE: **10-4-06**  
 APPROVED BY: **CEL**  
 CHECKED BY: **CL**  
 DRAWN BY: **RN**  
**1900**  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE  
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

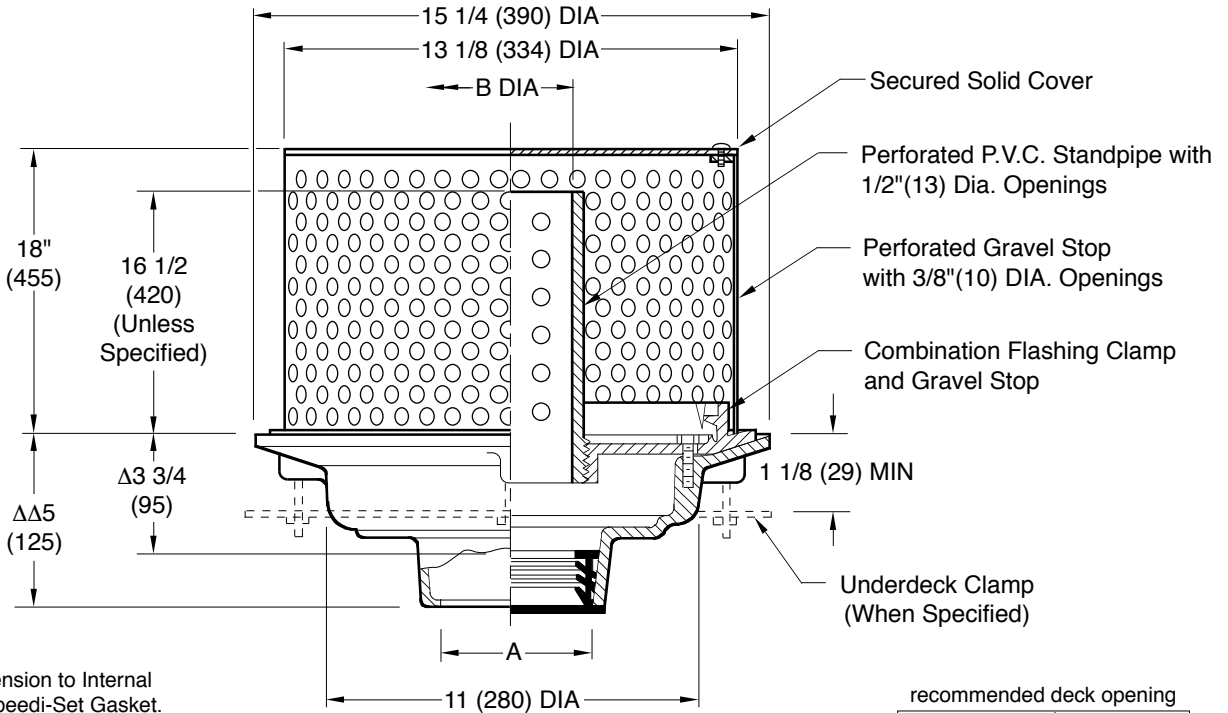

Δ This Dimension to Internal Stop of Speedi-Set Gasket.  
 ΔΔ Same for Caulk, NO-HUB and Speedi-Set. 3 3/4 (95) for Threaded.

recommended deck opening	
with suffix -R	17 (430) DIA
less Suffix -R	14 (355) DIA

A(Pipe Size)	02(50)	03(75)	04(100)	05(125)	06(150)	08(200)
B (DIA)	4(100)	4(100)	4(100)	6(150)	6(150)	8(200)

- Fig. 1900C . . . . . CAULK OUTLET
- Fig. 1900Y . . . . . NO-HUB OUTLET

**REGULARLY FURNISHED:**  
 Duco Cast Iron Body, Flashing Clamp and Stainless Steel Perforated Gravel Stop with 3/8"(10) DIA. Openings and Secured Solid Cover and P.V.C. Perforated Internal Standpipe.

- VARIATIONS:**
- "L" Shaped Underdeck Clamp -CL
  - L Speedi-Set Service Weight  
02(50), 03(75) & 04(100) sizes only
  - LXH Speedi-Set Extra Heavy  
02(50), 03(75) & 04(100) sizes only
  - Sump Receiver -R
  - Underdeck Clamp -C
  - T Threaded Outlet

- OPTIONAL MATERIALS:**
- Galvanized Cast Iron Body and Collar -G

**NOTE:** Dimensions shown in parentheses are in millimeters.

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
C	04/19/10	Added 16 1/2 unless specified	JJ	TK			<b>1900</b>
B	03/25/10	Removed SQ note	JJ	TK			
A	10/29/09	Renamed as 1900	JJ	TK			