


3/4" GHT WASHING MACHINE OUTLET BOX VALVES

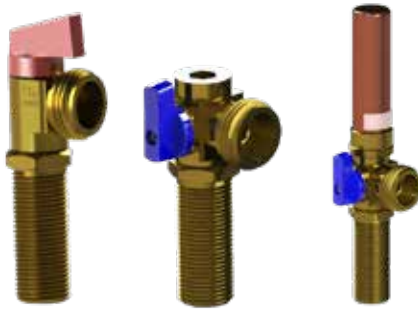

DESIGN FEATURES

- Quick quarter-turn ball valves
- Heavy duty brass construction ensures durability
- Color coded handles – red/blue for hot/cold
- Pliable double stem o-rings won't distort or break down
- PTFE seats for extra wear resistance

SPECS

- Working temperature: 40-160°F
- Max Working Pressure: 125 PSI

COMPLIANCES/LISTINGS

- IAMPO Certified, cUPC
 - Listing N-6614 & 4577
- Meets or Exceeds ASME A112.18.1
- HA Valves are ASSE 1010 certified

Handle	STD. Valve	Valve w/ H.A.	Non-H.A. for Simplex
With Copper Sweat Valves			
Red	P-06287	P-09100-R	P-06315
Blue	P-06286	P-09100-L	P-06314
With CPVC Valves			
Red	P-06292	P-09110-L	P-06319
Blue	P-06291	P-09110-R	P-06318
With Crimp Pex Valves			
Red	P-06301	P-09120-L	P-06317
Blue	P-06300	P-09120-R	P-06316
With Viega Valves			
Red	-	P-06338	-
Blue	-	P-06337	-
With UPONOR ProPEX® Valves			
Red	P-06421	P-09130-L	P-06370
Blue	P-06420	P-09130-R	P-06371
Accessories/Replacement Parts			
1/2" Plastic Nut for Mounting Valve		P-06068	
Simplex Handle		P-06066	

H.A. = Hammer Arrester

"-L" indicates handle is to the left hand side of the valve's outlet

"-R" indicates handle is to the right hand side of the valve's outlet

Product Submittal	
Job Name:	Date:
Part Number:	Quantity:
Architect:	
Contractor:	

Content matter is subject to change at any time. It is the user's responsibility to ensure the most updated revisions are obtained. 2/2021