

FLOOR DRAINS

WITH 8 1/2" (215) ROUND TOPS AND SEDIMENT BUCKETS

"SAFE-SET" BUCKET

Load Rating: Light Duty having a Safe Live (Static) Load less than 2,000 lbs. (900 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

For general use where waste water contains solids or debris that must be prevented from entering drainage lines. "Safe-Set" design insures bucket replacement after cleaning, since top grate cannot be inserted unless bucket is in place.

Free Area
 9.25 SQ IN
 (60) SQ CM

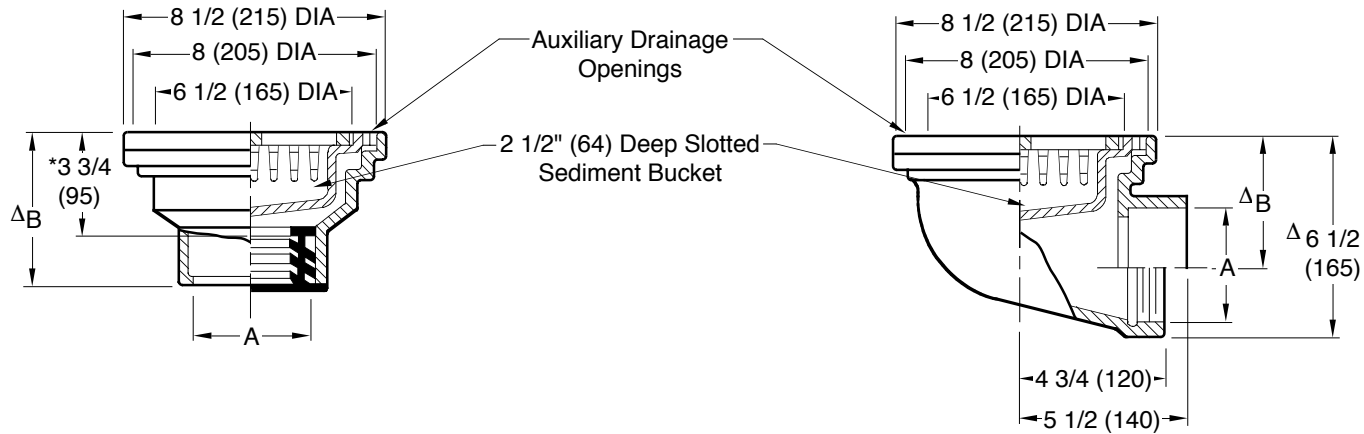


Fig. 2210C. . . . CAULK OUTLET
 Fig. 2210Y. . . . NO-HUB OUTLET

Fig. 2215C. . . . CAULK OUTLET
 Fig. 2215T. . . . THREADED OUTLET

A SIZE	02 (50)	03 (75)	04 (100)
B	5 (125) for Caulk, NO-HUB and Speedi-Set 3 1/2 (89) for Threaded		

A SIZE	02 (50)	03 (75)	04 (100)
B	4 3/4 (120)	4 1/4 (110)	3 3/4 (95)

REGULARLY FURNISHED:

Duco Cast Iron Body with Cast Iron Grate and Sediment Bucket.

*This Dimension to Internal Stop of Speedi-Set Gasket.

Δ Add 1/4" (6) when bronze top is specified

VARIATIONS:

- Dome Grate -D
- Hinged Grate -H
- L Speedi-Set Service Weight (Fig. 2210 only)
- LXH Speedi-Set Extra Heavy (Fig. 2210 only)
- NO-HUB Adaptor (Specify Fig. 2646Y) (Fig. 2215 only)
- Square Top -S
- Trap Primer Connection -P050 1/2" (13) & -P075 3/4" (19)
- Vandal Proof Grate -U
- Wide Flange Deck Drain (Specify Fig. DX2565)
- T Threaded Outlet
- Quad Close Trap Seal (Specify Fig. 2692) (Fig. 2210 Only)

OPTIONAL MATERIALS:

- Ductile Iron Bucket and Grate -MGB
- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER S2210
 SIZE A
 SCALE: NONE
 DATE: 5-17-85
 APPROVED BY: TD
 CHECKED BY: TD
 DRAWN BY: CMB

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

2210, 2215

H	7-22-19	Added Load Rating	MW	JM	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
G	6-17-19	Removed Function	MW	JM			2210, 2215
F	6-12-15	Revised Variations	TBW	CL			
E	4-8-97	Added Millimeters	EMB	BS			
REV.	DATE	DESCRIPTION	BY	CKD. BY			