


PARKING DRAINS WITH 12" (305) ROUND TOPS

HEAVY DUTY DRAINS WITH TRACTOR GRATE

FUNCTION: Used in heavy traffic areas where waste water contains no sediment or debris and floor construction requires a shallow drain. Body flange and flashing collar serve as anchor in on grade locations and as flashing clamp when installed in waterproof floors.

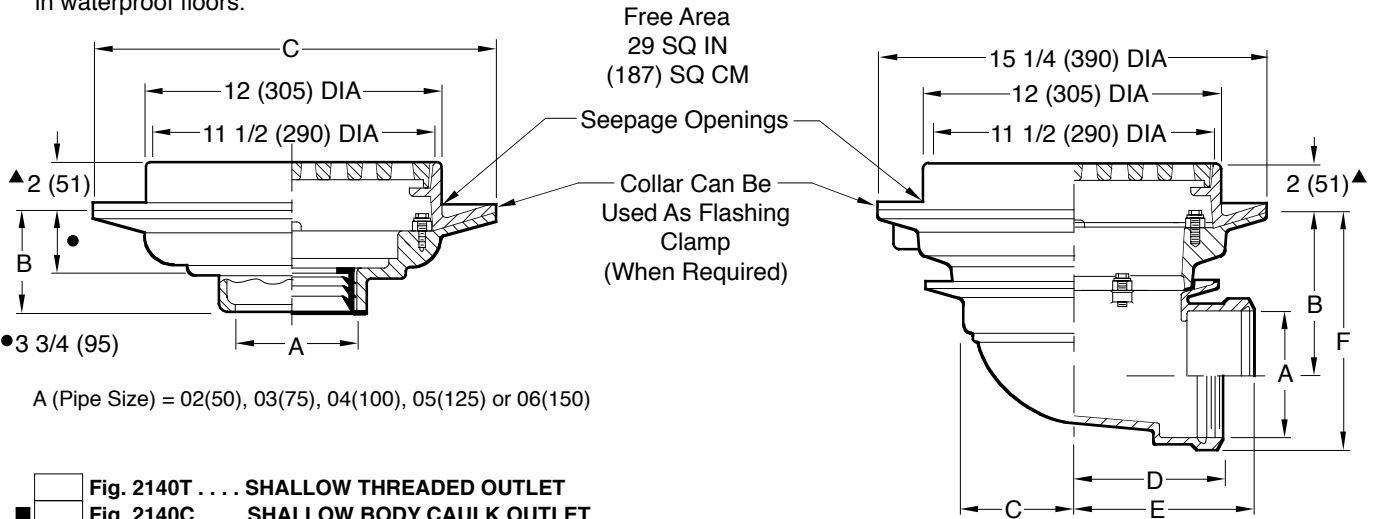

A (Pipe Size) = 02(50), 03(75), 04(100), 05(125) or 06(150)

- Fig. 2140T SHALLOW THREADED OUTLET
- Fig. 2140C SHALLOW BODY CAULK OUTLET
- Fig. 2141C DEEP BODY CAULK OUTLET
- Fig. 2141T THREADED OUTLET
- Fig. 2141Y DEEP BODY NO-HUB OUTLET

- Fig. 2145C CAULK OUTLET
- Fig. 2145T THREADED OUTLET

Figure	B			C DIA
	Caulk	Thread	NO-HUB	
2140	3 3/4 (95)	3 3/4 (95)	5 (125)	**15 1/4 (390)
2141	5 (125)	3 3/4 (95)	5 (125)	15 1/4 (390)

A SIZE	02 (50)	03 (75)	04 (100)	05 (125)	06 (150)
B	6 7/8 (175)	6 3/8 (162)	5 7/8 (149)	5 (125)	4 1/2 (115)
C	4 3/4 (120)	4 3/4 (120)	4 3/4 (120)	6 1/4 (160)	6 1/4 (160)
D	6 (150)	6 (150)	6 (150)	6 5/8 (168)	6 7/8 (175)
E	7 1/4 (185)	7 1/2 (190)	7 3/4 (195)	7 3/4 (195)	7 3/4 (195)
F	8 5/8 (219)	8 3/4 (220)	8 3/4 (220)	8 1/2 (215)	8 1/2 (215)

** Dimension is 16 (405) for Caulk outlet.

REGULARLY FURNISHED:

Duco Cast Iron Body and Flashing Collar with Cast Iron Tractor Grate.

VARIATIONS:

- Flat Bottom Strainer -FBS
- L Speedi-Set Service Weight
02(50), 03(75) & 04"(100) sizes only (Fig. 2141 only)
- LXH Speedi-Set Extra Heavy
02(50), 03(75) & 04"(100) sizes only (Fig. 2141 only)
- NO-HUB Adaptor (Specify Fig. 2646Y)
(Fig. 2140 & 2145 only)
- Sediment Bucket -B
- Square Top -S
- Trap Primer Connection -P050
1/2" (13) & -P075 3/4" (19) (Fig. 2141, & 2145 only)
- Vandal Proof Grate -U
- Heel Proof Grate -Q45
- Quad Close Trap Seal
(Specify Fig. 2692) (Fig. 2140 & 2141 Only)

OPTIONAL MATERIALS:

- Ductile Iron Grate -M
- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB
- Stainless Steel (Specify Fig. 9730)

• This Dimension to Internal Stop of Speedi-Set Gasket.

▲ add 1/8" (3) when bronze top is specified.

■ Meets U. S. Gov't Spec. WW-P-541-b. Type 220 04" (100) size only.

NOTE: Fig. 2145 in 02(50), 03(75), & 04"(100) sizes require a transition collar (as shown in above illustration) which fits between the body & collar. 05(125) & 06(150) sizes do not require transition collar.

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER S2140
SIZE A
SCALE: NONE
DATE: 5-17-85
APPROVED BY: TD
CHECKED BY: TD
DRAWN BY: BS
FIGURE NUMBER 2140, 2141, 2145

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
L	9-11-19	Rev. & Add Fig. Opts, Vars. & NOTE	MW	CL			2140, 2141, 2145
K	1-18-17	Revised Symbols	TBW	CL			
J	6-11-15	Revised Variations	TBW	CL			
H	1-10-07	Revised Chart	RN	CL			