

FLOOR DRAINS

WITH 8 1/2"(215) ROUND ADJUSTABLE TOP AND "SAFE-SET" SEDIMENT BUCKET

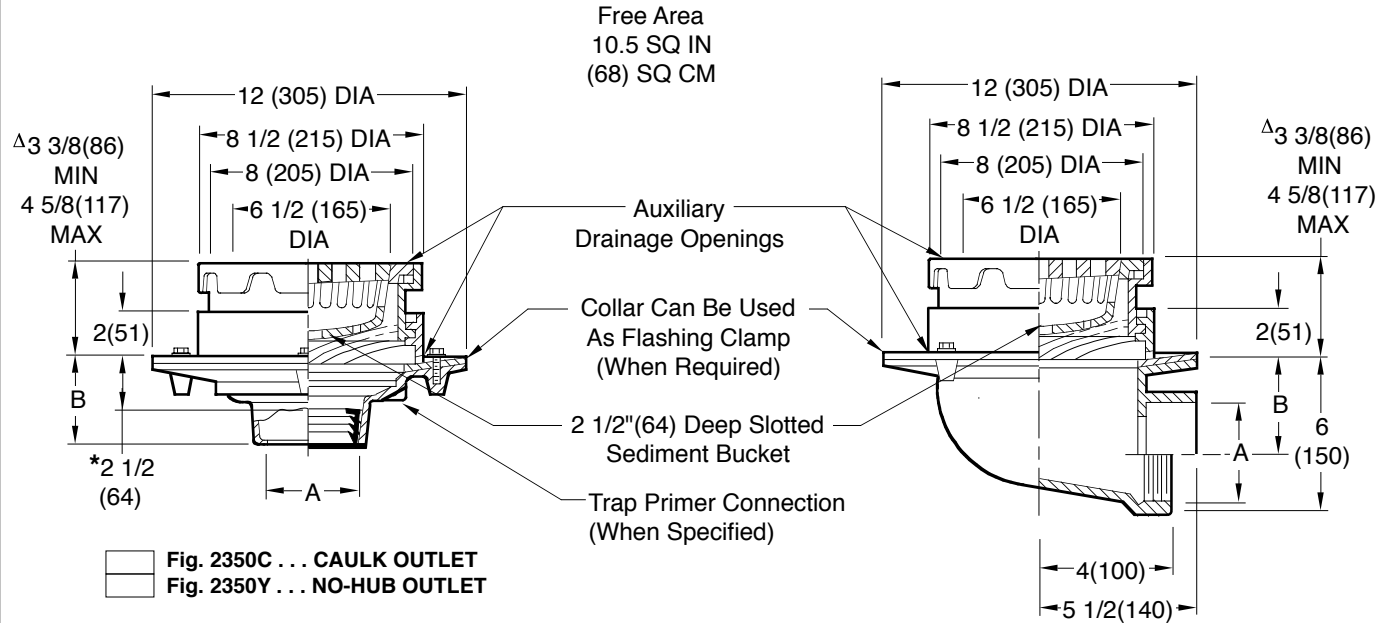


Fig. 2350C . . . CAULK OUTLET
 Fig. 2350Y . . . NO-HUB OUTLET

Fig. 2355C . . . CAULK OUTLET
 Fig. 2355T . . . THREADED OUTLET

A SIZE	02 (50)	03 (75)	04 (100)	06 (150)
B	3 3/4 (95) for Caulk, NO-HUB, and Speedi-Set, 2 (51) for Threaded		3 3/4 (95) NO-HUB Only	

* This Dimension to Internal Stop of Speedi-Set Gasket
 Δ Add 1/4"(6) when bronze top is specified.

A SIZE	02(50)	03(75)	04(100)
B	41/4(110)	3 3/4(95)	3 1/4(83)

REGULARLY FURNISHED:

Duco Cast Iron Body and Flashing Collar with Adjustable Top and Bar Grate with Sediment Bucket.

▲ Not available in Safe-Set design. Full grate is provided with a suspended bucket.

VARIATIONS:

- ▲ Dome Grate -D
- Extension (Specify Height) -E
- Flat Bottom Strainer -FBS
- L Speedi-Set Service Weight (Fig. 2350 only)
- LXH Speedi-Set Extra Heavy (Fig. 2350 only)
- NO-HUB Adaptor (Specify Fig. 2646Y) (Fig. 2355 only)
- Square Top -S
- ** Trap Primer Connection -P050 1/2"(13) & -P075 3/4"(19)
- Vandal Proof Top -U
- T Threaded Outlet
- Quad Close Trap Seal (Specify Fig. 2692) (Fig. 2350 Only)

OPTIONAL MATERIALS:

- Ductile Iron Bucket and Grate -MGB
- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB

**Not available on Fig. 2350T threaded outlet drain.

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER: S2350
 SIZE: A
 SCALE: NONE
 DATE: 5-17-85
 APPROVED BY: TD
 CHECKED BY: TD
 DRAWN BY: PJ
2350, 2355
 FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
L	6-18-19	Removed Function	MW	JM			2350, 2355
K	6-18-15	Revised Variations	TBW	CL			
J	11/17/05	Revised 2350 A-Size Table	JJ	CL			
H	5-27-99	Rev Var & added note	TBW	BS			