S3710

4

NONE

SUPERSEDED OR VOID DATA

Р

USE

RESPONSIBILITY FOR

9 9-19-85

CAN ASSUME

NOTICE

WITHOUT 9

AND CHANGE

TOLERANCE

TO MANUFACTURERS

VGD

3710,3715,3720,3725

FIGURE NUMBER

APPROVED BY

SJM

DRAWING NUMBER

MONTGOMERY, ALABAMA 36109-0237 (USA)



LOCATION

FUNNEL-CEPTOR® INDIRECT **WASTE DRAINS**

WITH ROUND TOPS

MEDIUM GRATE WITH ROUND FUNNEL

FUNCTION: Used to receive the drip, condensate or waste water from indirect waste lines. The funnel prevents splashing and directs the waste into the drain. The exposed portion of grate serves as drain for any other waste on the floor. The funnel is attached to the grate by means of concealed screws and it may be moved to any grate location desired. The round funnel is recommended for single pipe use only. Adjustable top permits accurate positioning of the grate, as necessary, to meet the finished floor level.

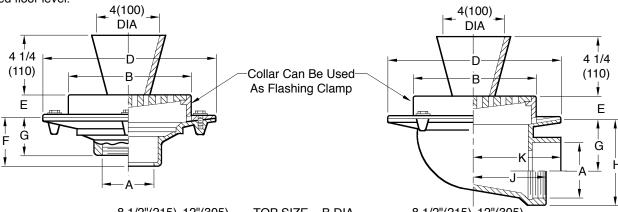


Fig. . . . 3710C 3715C CAULK OUTLET. Fig. . . . 3720C 3725C Fig. . . . 3710T . . . 3715T . . . THREADED OUTLET. . . Fig. . . . 3720T . . . 3725T

BOTTOM OUTLET DIMENSIONS

A SIZE	B DIA	D DIA	Е	F	G THD.
02(50),03(75),	8 1/2	11 1/2	2	3 3/4	2
04(100)	(215)	(290)	(51)	(95)	(51)
02(50),03(75),04(100),	12	15 1/4	2 1/2	5	3 3/4
05(125) or 06(150)	(305)	(390)	(64)	(125)	(95)

*Add 1/4" (6) when bronze top is specified.

SIDE OUTLET DIMENSIONS

A SIZE	B DIA	D DIA	Е	G	H	J	K
02(50)	8 1/2	12	2	4 1/4(110)	6	4	5 1/2
03(75)	(215)	(305)	(51)	3 3/4(95)	(150)	(100)	(140)
04(100)				3 1/4(83)			
02(50)	12	15 1/4	2 1/2	6 7/8(175)	9	6	6 3/4
03(75)	(305)	(390)	(64)	6 3/8(162)	(230)	(150)	(170)
04(100)				5 7/8(149)			
05(125)	12	15 3/4	2 1/2	5(125)	9	6 3/4	7 3/4
06(150)	(305)	(400)	(64)	4 1/2(115)	(230)	(170)	(195)

REGULARLY FURNISHED:

Duco Cast Iron Flanged Receptor, Bar Grate and Funnel.

NOTE: Dimensions shown in parentheses are in millimeters.

VARIATIONS:

L Speedi-Set Service Weight (Available on Bottom Outlet Drains) 02(50), 03(75) & 04"(100) sizes only

LXH Speedi-Set Extra Heavy (Available on Bottom Outlet Drains) 02(50), 03(75) & 04"(100) sizes only

Secured Grate -SG Sediment Bucket -B

6"(150) Dia. Funnel (Fig. 3581) -6 6(150) x 2 1/2(64) x 1"(25) High Oval

Funnel (Fig. 3590) Vandal Proof Secured Grate -U

Y NO-HUB Outlet

(Available on Bottom Outlet Drains)

OPTIONAL MATERIALS:

Chrome Plated Grate and Funnel -CP Nickel Bronze Grate and Funnel -NB Polished Bronze Grate and Funnel -PB

NOTE: 02(50), 03(75) & 04"(100) sizes with 15 1/4(390) "D" Dim. require a transition collar (not shown in above illustration) which fits between the body and collar. Above illustration is typical for the 05(125) & 06"(150) sizes (3725 only).

E D	5-24-99 5-13-99	Revised Changed Reg. Furn.	CMD CMD	BS BS	_	VOLUME CUBIC FEET	3710, 3715,
REV.	DATE	DESCRIPTION	BY	CKD. BY			3720, 3725